

Element M24-OF

24" Open Frame Touch Display



Element **M24-OF** is an IP65 commercial grade open frame touch display. The 23.8" Full Flat Touch Screen LCD Digital Display has a very high contrast screen 3000:1, with slim bezel free design and 1920 x 1080 (FHD) resolution ensure the sharpest of images.


With 10 point multi touch display and I/O's including HDMI, Display Port, VGA and USB, the **M24-OF** is suitable for many applications and multi roles such as Digital Signage Display / Information Display, Self-Check In and Self-Check Out, or Self Service Terminals (Self Ordering).



OPTIONAL MOUNT BRACKET



VESA MOUNT 100 X 100MM

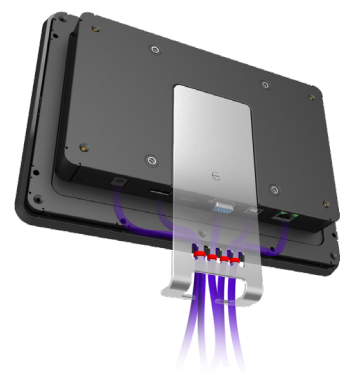

CONVENIENT CABLE MANAGEMENT

Technical Specifications - Element M24-OF

Item		Parameter
Size		23.8" TFT LCD
Maximum Resolution		1920 x 1080
Contrast Ratio		3000:1
Brightness (Backlight Type)		250 nits (No Touch), 225 nits (Projected Capacitive)
View Angle		H:178°, V:178°
Touch LCD Display	Touch Type	Projected Capacitive
	Touch Points	10
	Touch Screen Interface	USB-HID (Type B)
I/O Port	USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
	Video Port	1 x VGA (DB15), 1 x DP, 1 x HDMI
	Audio Port	Line-Out
	Power Input	1 x 12 VDC Jack with lock
Physical Properties	Power Supply	36 W (12VDC, 3A) External Power Adaptor
	Housing Colour	Black
	Material	Glass, Plastic (ABS), SECC Metal
	Compliance	Front Panel IP65 Compliant
	Dimensions (W x H x D) mm	575.0 x 347.0 x 42.4
	Net Weight (kg)	5.8 kg
	Gross Weight (kg)	8.0 kg
	Carton (W x H x D) mm	685 x 455 x 150
	VESA	100 x 100 mm
	Ball Drop / IK	UL60950(500g/1.3m) and IK08
Safety	Certifications	CE(B), FCC(B), CCC(B), UL, cUL, RCM, BSMI, RoHS
Environment	Operating Temperature / Humidity	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
	Storage Temperature / Humidity	-20°C ~ 60°C, 10% ~ 95% RH. Non-Condensing
Optional Peripherals	Remote Key	1 x RJ45 (for OSD connector)
Interface		