

APM-22

P-CAP



APM-22

IP 65 commercial grade open
frame monitor



Cable management




Detail




Features

I/O port

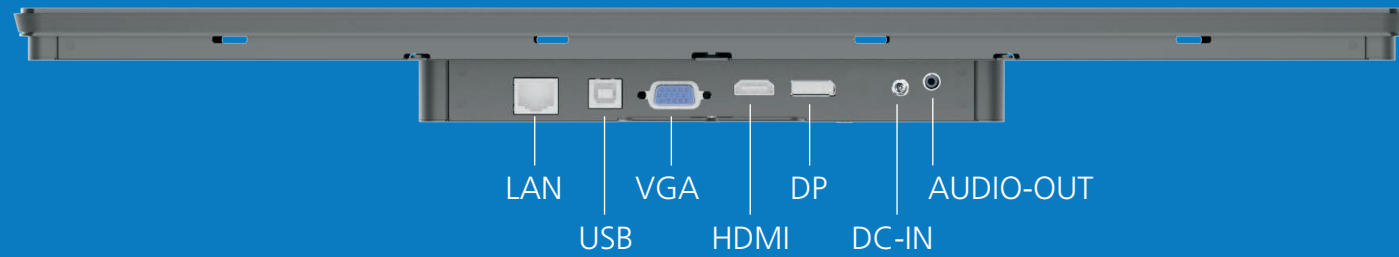


Bracket mount

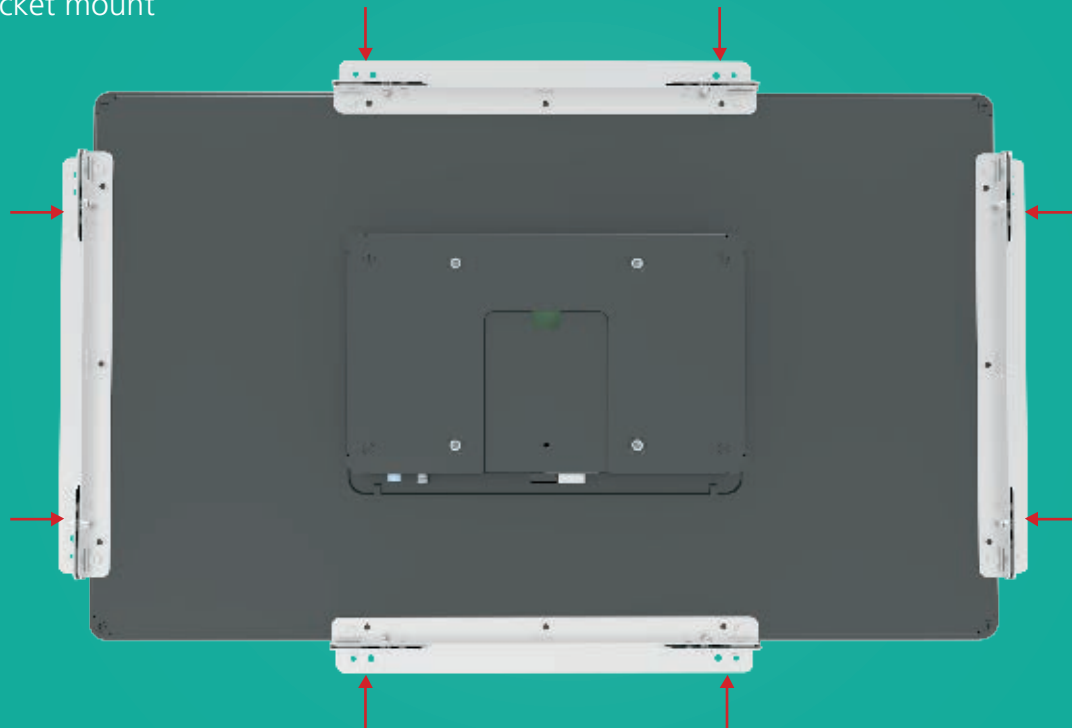

Slim design

Flat type

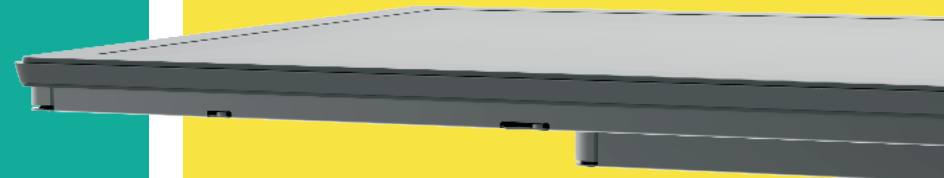

Specification

APM-22	
Size	21.5" TFT LCD
Maximum Resolution	1920 x 1080
Contrast Ratio	1000:1
Brightness (Backlight Type)	250 nits (No Touch), 225 nits (Projected Capacitive)
View Angle	H:178°, V:178°
Touch LCD Display	
Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)
IO ports	
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA (DB15), DP x 1, HDMI x 1
Audio Port	Line-Out
Power Input	1 x 12V DC Jack with lock
Physical Properties	
Power Supply	DC 12V with lock External Power
Housing Color	Black
Construction	Glass, Plastic (ABS), SECC Metal
Compliance	Front Side IP65 Compliant
Dimensions (W x H x D) mm	516.0 x 311.0 x 42.4
Net Weight (kg)	4.75 kg
Gross Weight (kg)	6.5 kg
Carton (W x H x D) mm	405 x 160 x 610
VESA	100 x 100 mm
Ball Drop	UL60950(500g/1.3m) and IK08
Safety	
Certifications	CE, FCC Class B, CCC
Environment	
Operating Temperature	0°C ~40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 95% RH. Non-Condensing
Optional Peripherals	
Remote Key	1 x RJ45 (for OSD connector)