



# TEF-15

## P-CAP

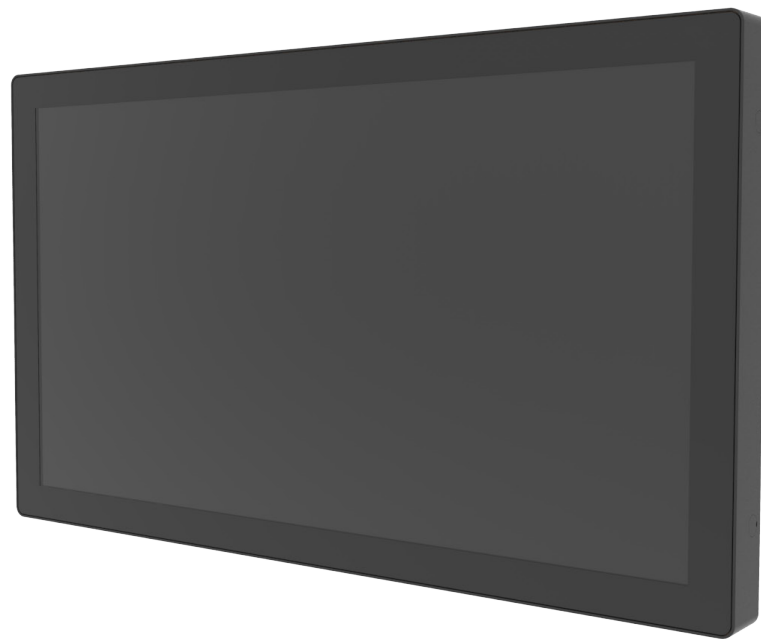

# TEF-15

Vesa 100x100 mount or bracket mount

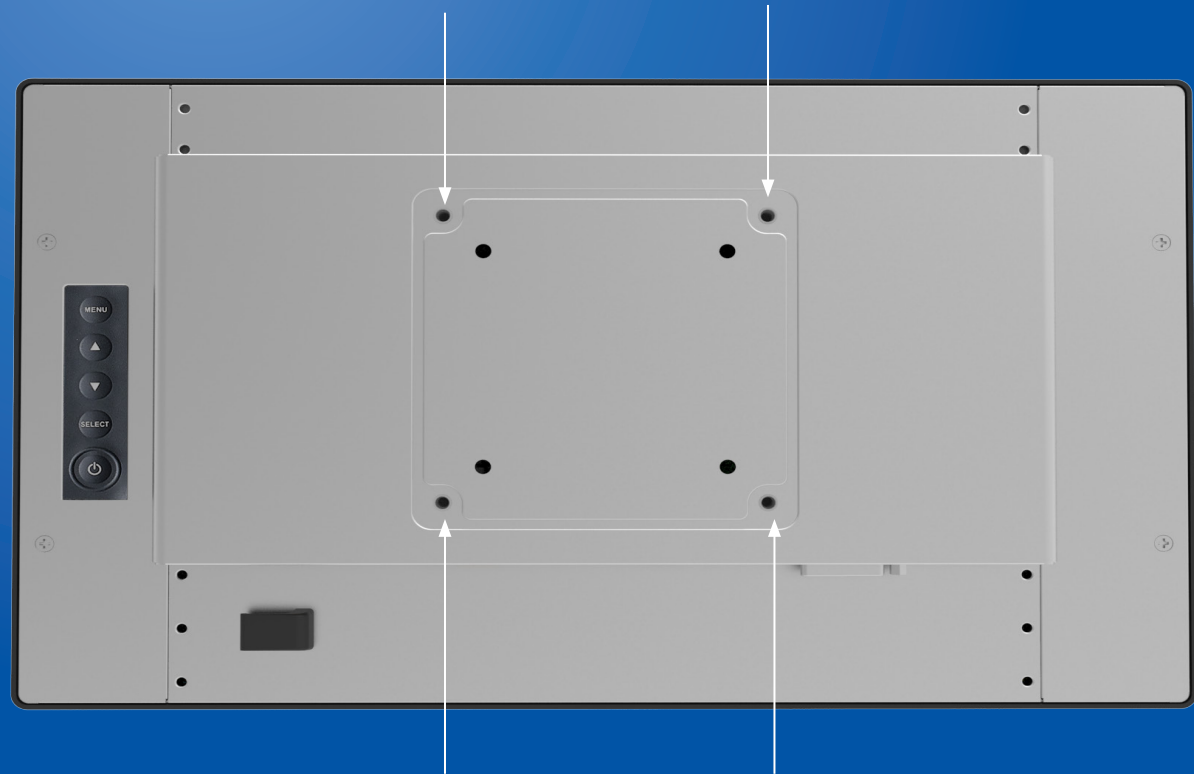


# Features

IO Port



OSD controls

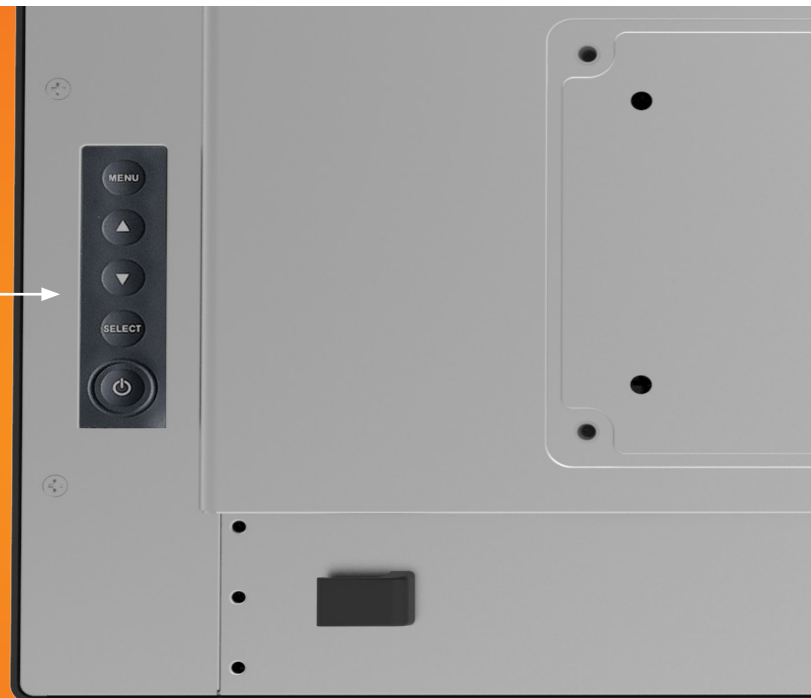

Slim Design



# Specification

TEF-15	
Size	15.6" TFT LCD
Maximum Resolution	1366 x 768
Contrast Ratio	500:1
Brightness (Backlight Type)	300 nits (No Touch), 270 nits (Projected Capacitive)
View Angle	H:170° , V:160°
Touch LCD Display	
Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)
IO ports	
Serial Port	1 x RJ11 (For remote key)
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA (DB15), 1 x DVI
Audio Port	NA
Power Input	1 x 2.1 mm 12V DC Jack
Physical Properties	
Power Supply	50W (12V, 4.16A) External Power Adaptor
Speaker	NA
Housing Color	Black, Silver (No Paint on Back)
Construction	Glass, SECC Metal
Compliance	IP65 Compliant Front Side, IPX1
Dimensions (W x H x D) mm	381.0 x 230.3 x 46.0 mm
Net Weight (kg)	2.7 kg
Gross Weight (kg)	4.5 kg
Carton (W x H x D) mm	455 x 365 x 290 mm
VESA	100 x 100 mm
Safety	
Certifications	CE, FCC, RoHS
Environment	
Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing