

TSM-15


P-CAP



TSM-15




Kensington lock

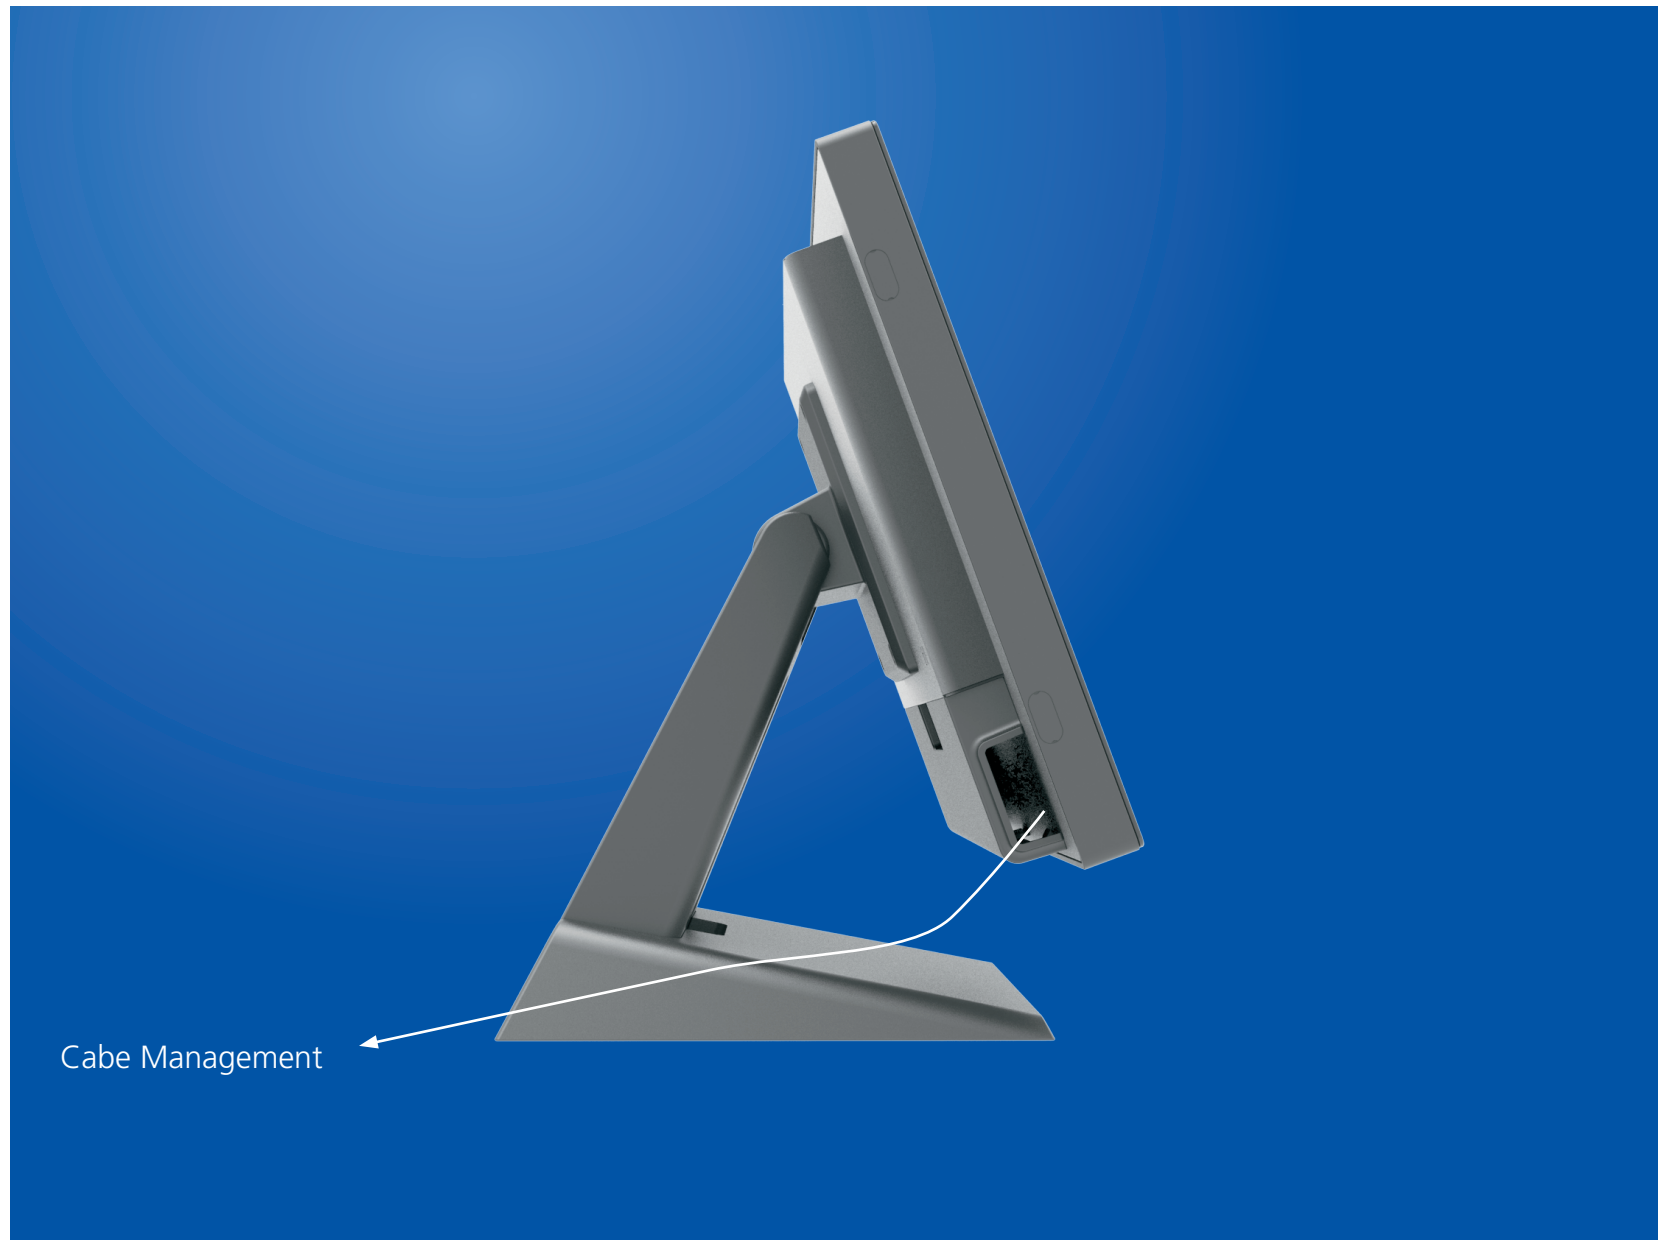


Cable Management

Features


VESA 100 X 100 mouting or side bracket mounting option

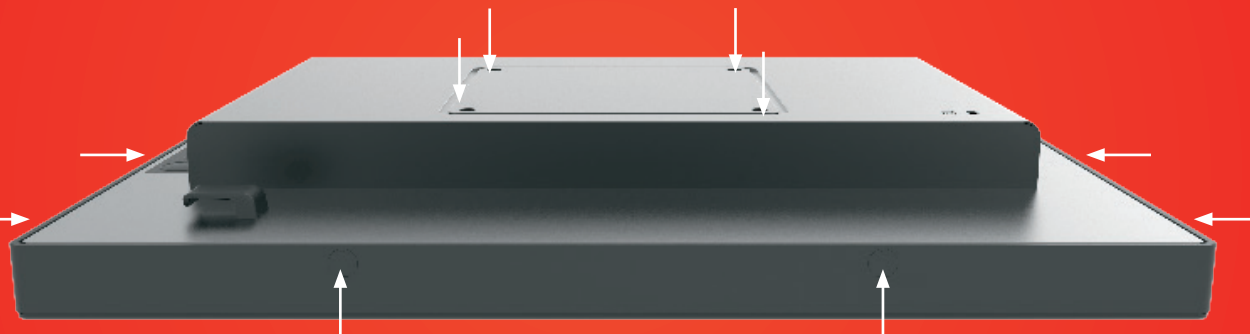


OSD Controls

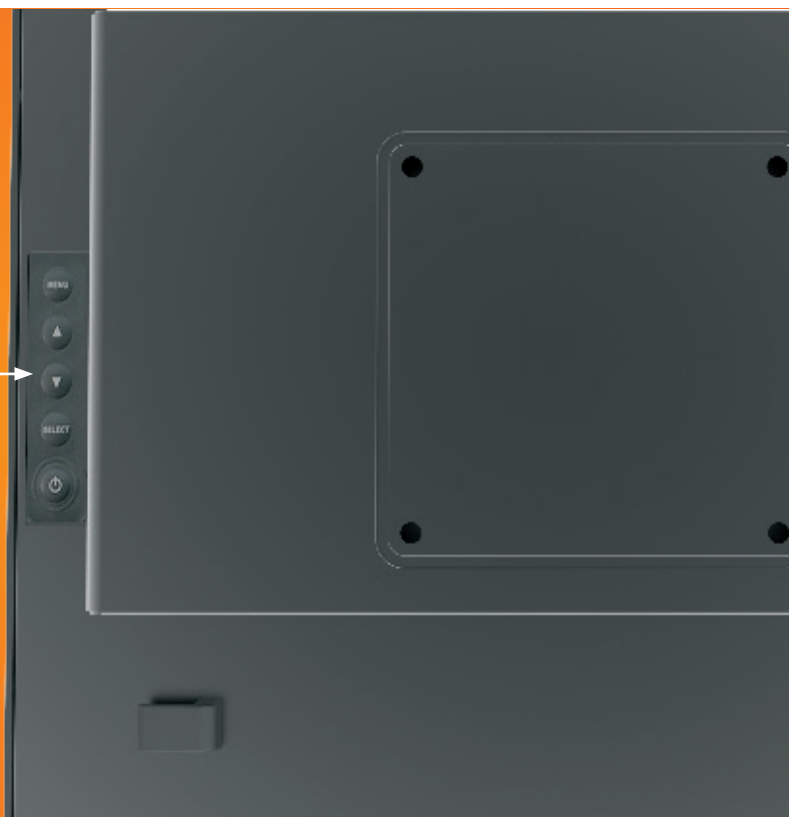

Optional stand

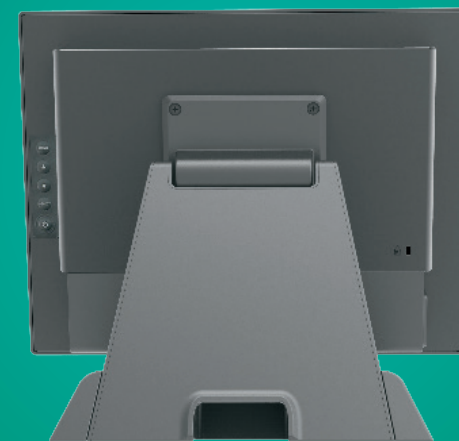

Specification

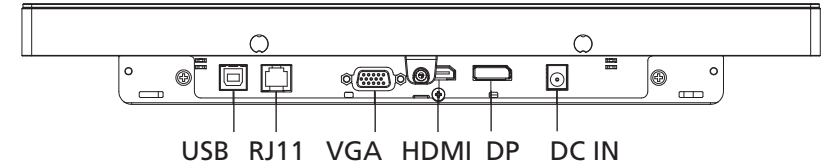

| TSM-15 | |
|-----------------------------|--|
| Size | 15" TFT LCD |
| Maximum Resolution | 1024 X 768 |
| Contrast Ratio | 700:1 |
| Brightness (Backlight Type) | 250 nits (No Touch), 225 nits (Projected Capacitive) |
| View Angle | H:170°, V:160° |
| Touch LCD Display | |
| Touch Screen | Projected Capacitive |
| Touch Points | 10 |
| Touch Screen Interface | USB-HID (Type B) |
| IO ports | |
| Serial Port | 1 x RJ11 (For remote key) |
| USB Port | 1 x USB 2.0 (Type B) for Touch Interface (USB-HID) |
| Video Port | 1 x VGA (DB15), 1 x HDMI, 1 x DP |
| Audio Port | NA |
| Power Input | 1 x 2.1 mm 12V DC Jack |
| Physical Properties | |
| Power Supply | 50W (12V / 2.5A) External Power Adaptor |
| Speaker | NA |
| Housing Color | Black |
| Construction | Glass, SECC Metal, Plastic (ABS) |
| Compliance | IP65 Compliant Front Side, IPX1 |
| Dimensions (W x H x D) mm | 337.4 x 304.2 x 200.9 mm (With Stand), 337.4 x 265.4 x 44.3 mm (Without Stand) |
| Net Weight (kg) | 4.4 kg |
| Gross Weight (kg) | 6.0 kg |
| Carton (W x H x D) mm | 370.0 x 415.0 x 290.0 mm |
| VESA | 100 x 100 mm |
| Safety | |
| Certifications | CCC, CE, FCC, RoHS |
| Environment | |
| Operating Temperature | 0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing |
| Storage Temperature | -20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing |