


TSM-17

P-CAP



TSM-17

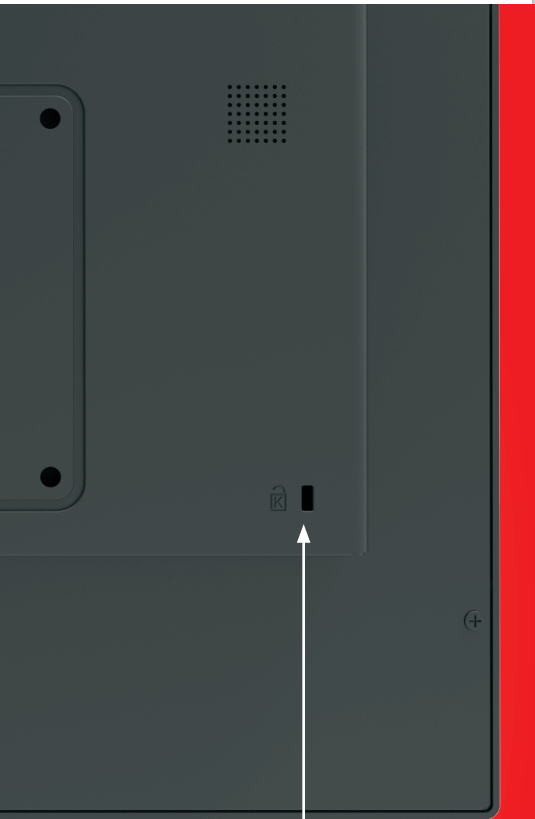


Kensington lock




Small footprint

Features


VESA 100 X 100 mouting or
side bracket mounting option

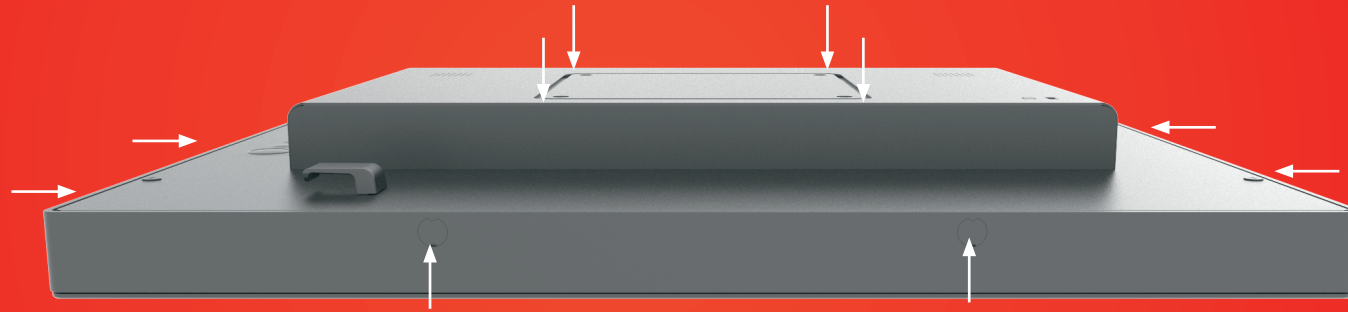


OSD Controls

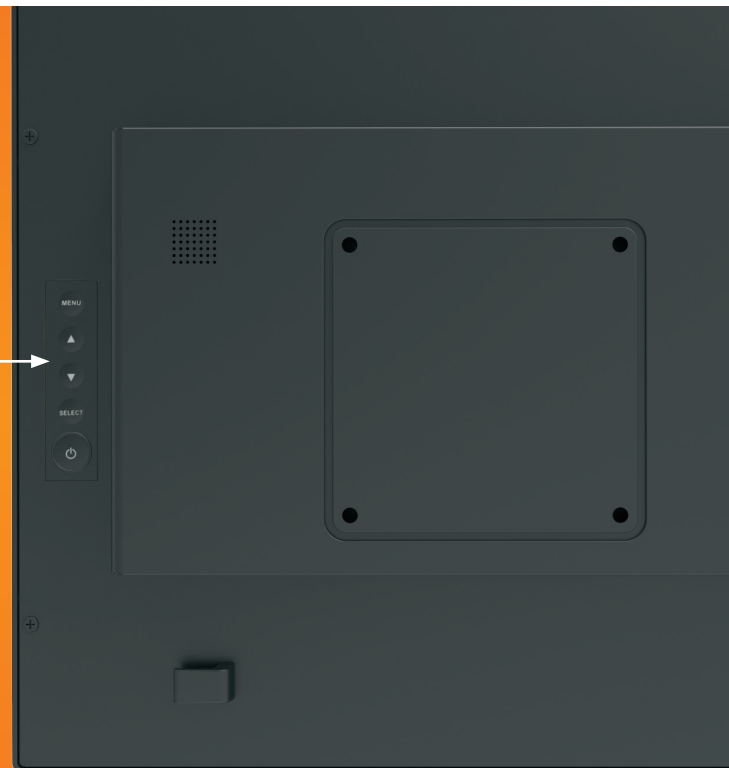

Optional stand

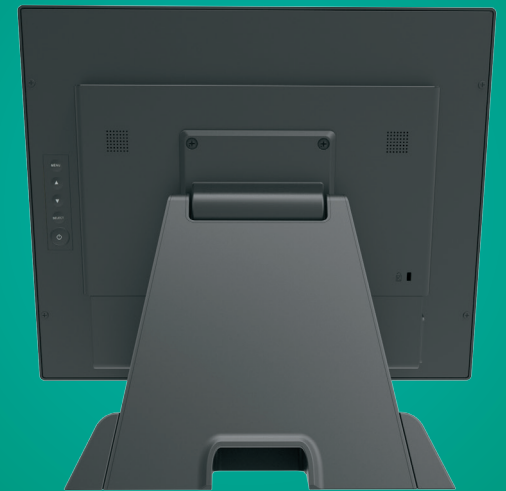

Specification

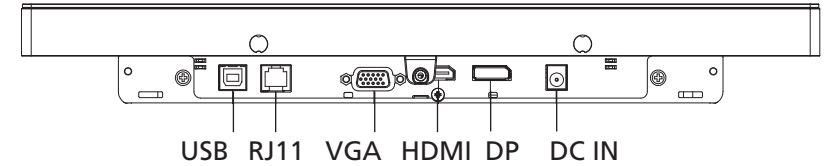

TSM-17	
Size	17" TFT LCD
Maximum Resolution	1280 x 1024
Contrast Ratio	1000 : 1
Brightness (Backlight Type)	250 nits (No Touch), 225 nits (Projected Capacitive)
View Angle	H:170°, V:160°
Touch LCD Display	
Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)
IO ports	
Serial Port	1 x RJ11 (for Remote Key)
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA (DB15), 1 x HDMI, 1 x DP
Audio Port	NA
Power Input	1 x 2.1 mm 12V DC Jack
Physical Properties	
Power Supply	50W (12V / 4.16A) External Power Adaptor
Speaker	NA
Housing Color	Black
Construction	Glass, SECC Metal
Compliance	IP65 Compliant Front Side, IPX1
Dimensions (W x H x D) mm	369.0 x 334.9 x 202.0 mm (With Stand), 369.0 x 307.0 x 47.3 mm (Without Stand)
Net Weight (kg)	5.3 kg
Gross Weight (kg)	7.3 kg
Carton (W x H x D) mm	450.0 x 418.0 x 277.0 mm
VESA	100 x 100 mm
Safety	
Certifications	CCC, CE, FCC, RoHS
Environment	
Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing