

# WTM133TR



## ADVANTAGES

- ▶ Easy to Deploy
- ▶ High Definition
- ▶ Multi Platform Support
- ▶ PCT Multi-touch Film
- ▶ Flexible Installation
- ▶ Durable and Professional Embedded Design



## TECHNICAL SPECIFICATIONS

## WTM-Series Embedded Touch All-in-one

Focus on Industry Touch and Display Solutions

Ver:May2018\_V1

### > LCD Panel

Backlight	LED
Brightness	300 cd/m <sup>2</sup>
Contrast Ratio	800:1
Viewing Angle	H:170° / V:170°
Response Time	30 ms (GTG)
Supported Colors	262K Colors
Display Resolution	1920 x 1080 (16:9)
Display Frame Rate	60Hz
Input Resolution	1920 x 1080 @ 60Hz(Analog) 1920 x 1080 @ 60Hz(Digital)

### > Touch

Touch points	10
Touch technology	Projected Capacitive (PCT)

### > Mechanical




Dimensions	334.1 x 221.7 x 39.7 mm
Package Dimension	TBD
Weight(approximately)	2.5 kg / 3.5 kg
Wall Mount Type	VESA,MIS-D,75,C
Connector	1x VGA /1x DVI /1x HDMI
Operation	0 °C ~ 50 °C, 90% RH
Storage	-20 °C ~ 60 °C, 90% RH

### > Electrical

Power Supply	DC in: DC 12V 5A Max
Normal Operation	≤ 10W (typ.)
Power Off	≤ 2 W (typ.)
Internal Speaker	no

### > Android(Options)

CPU	RK3288 Cortex-A17
Memory	2GB DDR3
ROM	8GB EMMC NAND
Connector	2xUSB /1xLAN /1xHDMI / 1xTF
Options	Signage Software

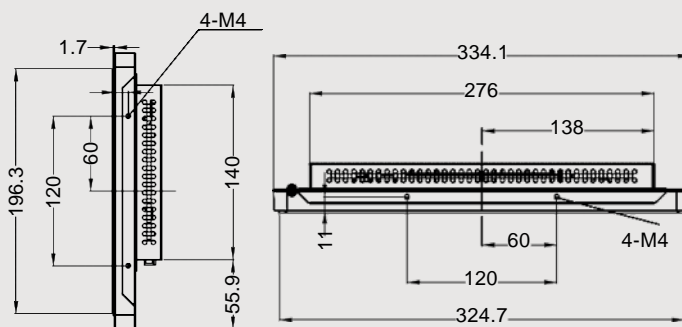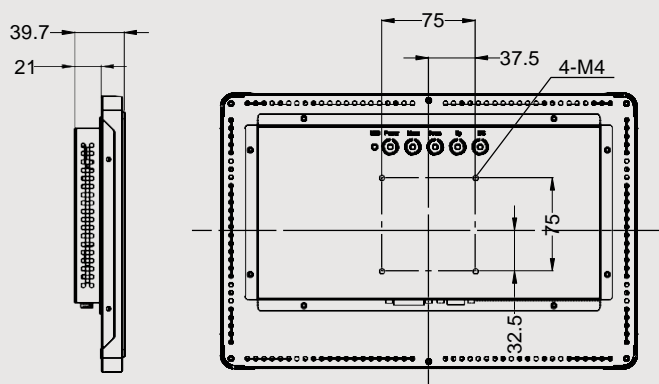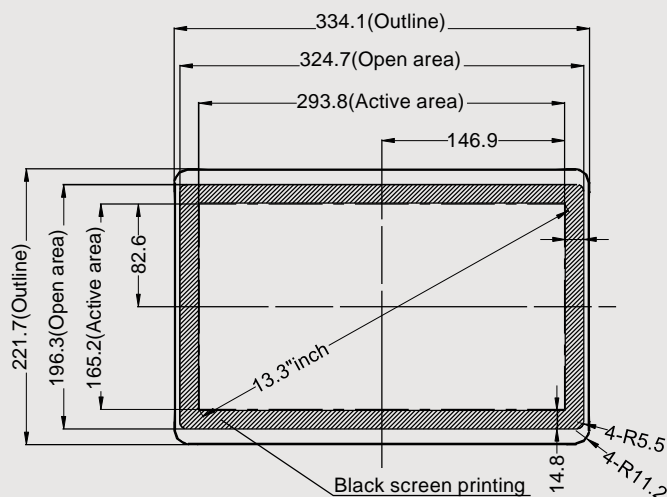

Monitor



Android

