


# WTM980US

WTM-US Series Monitor  
With IR Multi-Touch Screen  
and Edge-LED LCD Monitor

Ver:Dec2017\_V1

## PRODUCT DESCRIPTION

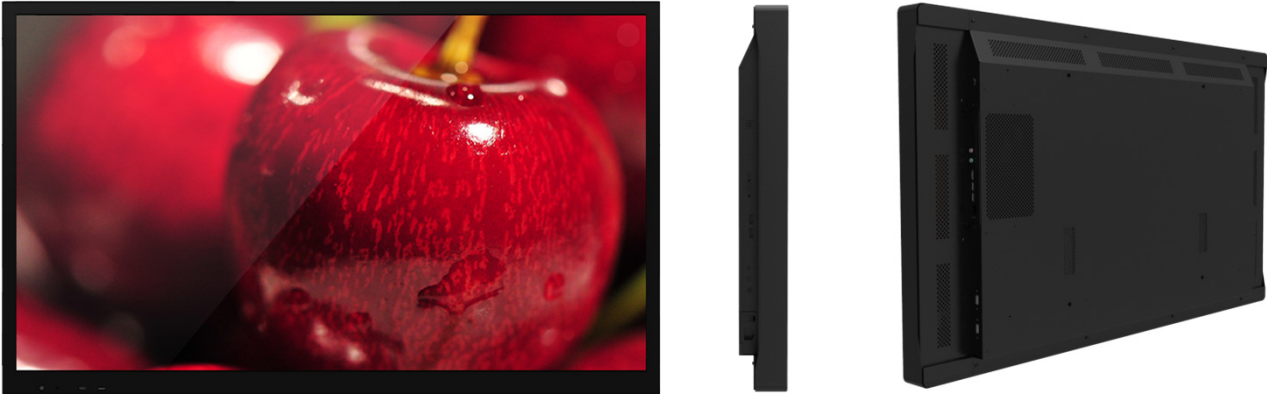

**WTM980US** is a LED commercial grade multi-touch monitor. It applies sleek design, offers wide viewing angles and clear, crisp images. Unlike typical consumer TV or monitor, it has unique interactive display design, which not only brings customers a stronger visual impact, also brings customers unprecedented touch experience. This rugged and durable product can withstand the constant interactivity inherent in public access venues, and ideas for retail, self-service, hospitality, transportation, education, and healthcare.

Typical Application:

Interactive Education Terminal, Interactive Digital Signage, Infotainment, etc.

## ADVANTAGES

### Easy to Deploy

Standard signal interface (plug-and-play). Auto on after power on or signal inputting. System power on/off.

### Ultra High quality LCD panel

Adopts energy saving E-LED, clear and Ultra High Definition(3840 x 2160 ) LCD panel

### Durable and Professional Design

All metal structure, sleek & elegant design, that makes the product durable and stable

### Flexible Installation

VESA mount, heavy-duty stand gives you a choice of fixed or desktop mounting

### Internal Intel OPS Pluggable Computer

No need additional space, high-degree system integration. Good thermal design to ensure the stability of PC

### Multi-Touch Experiences

Support up to 10/32 touch points simultaneously. Suitable for medium or large size touch monitors.

### Extended multi-touch gestures

Support Win7, TUIO, Flash TUIO etc.

### Perfect Various Operating System Support

Windows XP /7 /8, Android , Linux, Mac OS X

Focus on Industry Touch and Display Solutions

**anytouch**

## TECHNICAL SPECIFICATIONS LCD

### > LCD Panel

Backlight	LED
Brightness	500 cd/m <sup>2</sup>
Contrast Ratio	1300:1
Viewing Angle	H:178° / V:178°
Response Time	13 ms (GTG)
Supported Colors	1.06B Colors
Display Resolution	3840 x 2160 (16:9)
Display Frame Rate	120Hz
Input Resolution	1920 x 1080 @ 60Hz (VGA) 3840 x 2160 @ 30Hz (HDMI1.4)
Connector	1xHDMI/1xVGA/1xDVI

### > Mechanical

Dimensions	2234.8 x 1289.8 x 109.88 mm
Package Dimension	TBD
Weight(approximately)	130 kg

Wall Mount Type VESA,MIS-F,800x400,Y,8,90

### > OSD Functions

OSD Control	Push Button, IR Remote Controller
OSD Language	English, Chinese

### > Electrical

Power Supply	AC in: AC 100V ~ 240V (50/60 Hz)
Normal Operation	≤ 500W (typ.)
Power Off	≤ 2 W (typ.)
Internal Speaker	2x 8Ω/10W

### > Environmental

Operation	0 °C ~ 40 °C, 90% RH
Storage	-20 °C ~ 60 °C, 90% RH

### > Options

Touch Point	10 / 32
Other	Metal Stands, Wall mounts
OPS PC Support	Yes

## TECHNICAL SPECIFICATIONS TOUCH

Glass	5 mm ESG safety glass (optional with Anti-Glare (AG) or Anti-Reflective (AR) glass coatings)
Touch points	10 or 32 points (simultaneous)
Touch technology	Infrared
Touch method	Finger, gloved hand or any other pointer minimum radius 8 mm
Touch activation force	No pressure required

Response time	< 15ms
Touch accuracy	+/- 3mm over the entire touch sensitive area, USB reported touch resolution 32767 x 32767
Connection	USB 2.0 (B socket)
Multi-touch protocol support	Win 7, TUIO, Flash TUIO
Operating System	Win XP, Vista, Win 7, Win 8, Android, Linux, Mac OS X

### Shanghai Headquarter



TEL: +86 (0)21-58361091  
400-621-1510  
ADD: Room 6206-6207, Building 6, NO.1687 Changyang Road, Yangpu District, Shanghai, China

### Beijing Office







TEL: +86 (0) 10-81786110  
ADD: Room 1001, Unit 5, Building 2, Tiantongyuan North Second District, Changping District, Beijing, China



Learn more at: [www.any-touch.com](http://www.any-touch.com), email us at: [sales@any-touch.com](mailto:sales@any-touch.com)  
Specifications subject to change without notice.  
Copyright © 2017 Anytouch Technologies Co., LTD

2

1

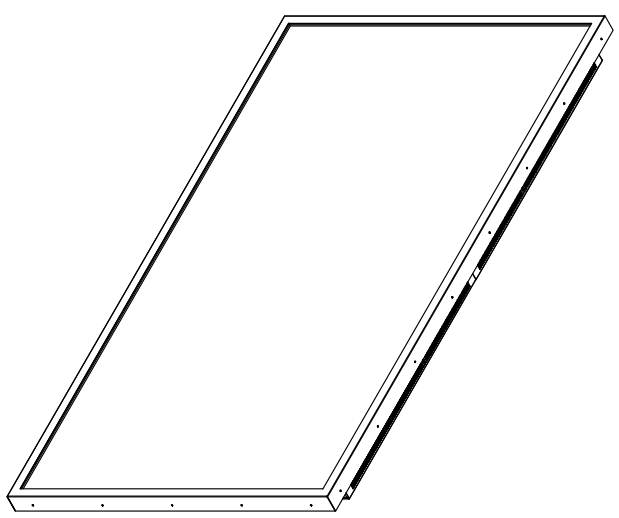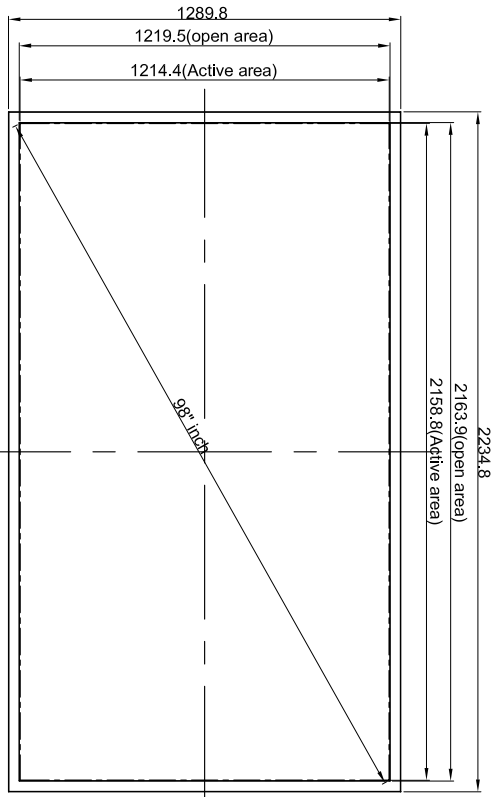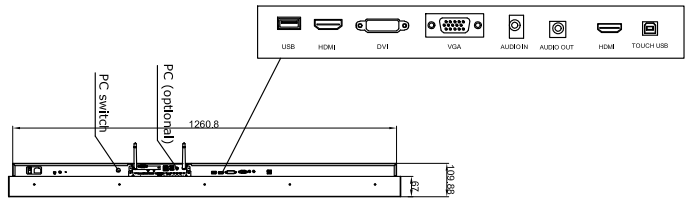

**Tolerance Table**

Dimension Range	Tolerance(mm)
Under 25 mm	0.1
25.1-100 mm	0.2
100.1-250 mm	0.4
250.1-400 mm	0.8
400.1-500 mm	1.5
500.1-630 mm	2.0
630.1-800 mm	2.5

**TOLERANCING**

UNLESS OTHERWISE SPECIFIED ALL DIMS ARE mm

X ±0.2

.XX ±0.1

RADIUS ±0.15

ANGLES ±0.5°



DO NOT SCALE DRAWING

<b>Title:</b> 98		<b>Scale:</b> NTS	
<b>Design:</b>	Material: SPCC	<b>Sheet:</b>	1 of 2
<b>Date:</b> 2017.12.13		<b>Var:</b>	01
<b>Dwg No:</b> TZC98.1			

Rev	Date	Description	By

2

1

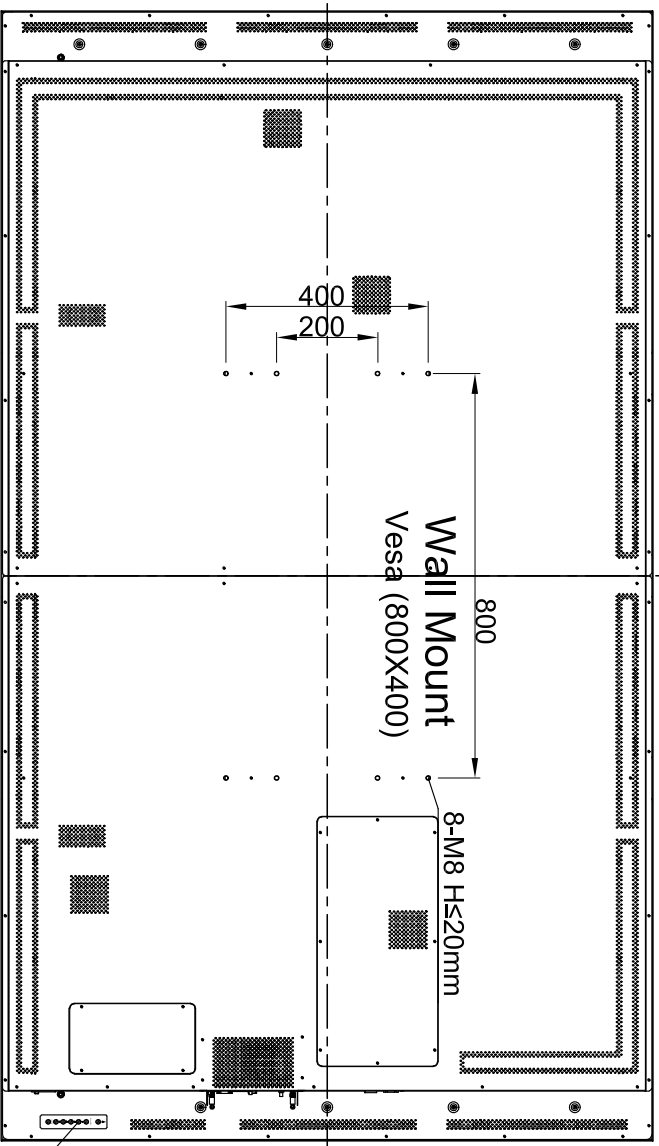

**Tolerance Table**

Dimension Range	Tolerance(mm)
Under 25 mm	0.1
25.1-100 mm	0.2
100.1-250 mm	0.4
250.1-400 mm	0.8
400.1-500 mm	1.5
500.1-630 mm	2.0
630.1-800 mm	2.5

**TOLERANCING**

UNLESS OTHERWISE SPECIFIED ALL DIMS ARE mm

X ±0.2      RADIUS ±0.15

XX ±0.1      ANGLES ±0.5°

DO NOT SCALE DRAWING

Rev	Date	Description	By

<b>Title: 98</b>		Material: SPCC		Scale: NTS	
Design:	2017.12.13	Sheet:	2 of 2	Ver: 01	
<b>Dwg No: TZC98.1</b>					

2

1

A

B

A

B

2

1