

产品型号：98P3

产品技术规格书

一 规格摘要(Specification Abstract)

1.1 规格概述 (Specification Overview)









	型号(Model)		参数(Parameter)
面板(Display)	LCD 尺寸(Size)		97.52"
	LCD 供应商(Brand)		LG
	背光类型(Backlight Type)		D-LED
	分辨率(Resolution)		3840×2160 (pixels)
	亮度(Brightness)	400cd/m ² (min.)	
		500cd/m ² (typ.)	
	屏对比度(Contrast Ratio)		1300:1 (typ.)
	响应时间(Response Time)		5ms (typ.)
	像素点距(Pixel Pitch)		0.5622mm×0.5622mm
	帧频(Refreshing Frequency)		120Hz
	视角(Viewing Angle)		178° (H) / 178° (V)
	寿命(Life Time)		30,000 hrs (min.)
	色域(Color Gamut) (x% NTSC)		72%
	可视面积(View Area)		2158.848mm×1214.352mm
	色彩度(Display Colors)		1.07B(10bit)
方案(Solution)	MSD6A838		
系统属性(Android)	CPU	架构(Architecture)	ARM Cortex A53
		工作主频(Working Frequency)	1.5GHz
		核心数(Core)	四核(Quad Core)
	GPU		Mali-820MP4
	内部缓存容量(RAM)		2GB DDR3
	内部存储容量(ROM)		8GB Standard(Optional 16GB)
	系统版本(OS)		Android 6.0
电源 (Power)	电压(Power requirements)		100 V ~ 240 V/AC, 50/60 Hz
	最大功率(Power consumption)		480W
	待机功率 (Power consumption in standby mode)		<0.5W
	电源(AC)输入 (Power(AC) Input)		×1

环境(Environment)	工作温度(Working Temperature)	0℃ ~ 40℃	
	储藏温度(Storage Temperature)	-10℃ ~ 60℃	
	储藏湿度(Storage Humidity)	10% ~ 90% RH Non-Condensing	
	工作湿度(Working Humidity)	20% ~ 85% RH Non-Condensing	
	图像模式(Image Mode)	标准, 柔和, 用户, 亮丽 (Standard, Soft, Users, Bright)	
	最长使用时间(小时×天) (The longest service time (Hour×Day))	18 Hours×7 days	
功能(Function)	伴音功率(Audio Output Power)	8W × 2	
	电源开关(Power Switch)	×1	
输入输出接口 (Interface)	HDMI 输入接口(HDMI IN)	×3	HDMI1.4/2.0 (3840×2160@60HZ)
	LAN 接口(LAN)	×1	10M/100M Base -T Interface: RJ45
	AV 输入接口(AV IN)	×1	Video:1 ± 0.1 Vp-p; Audio(L/R): 500mVrms; RCA(Yellow/White/Red)
	AUDIO 输出接口(AUDIO OUT)	×1	Audio(L/R): 0.2-2Vrms; Φ 3.5mm mini interface
	TV 输入接口(TV IN)	×1	System: PAL+NTSC+DTMB Receiving Frequency: ATV: 43-870MHz DTV: 474-858MHz Interface:IEC 169-2 Female
	S/PDIF 输出接口(S/PDIF OUT)	×1	Level:500 ± 100 mVp-p Type: Coaxial 同轴输出 RCA(Orange)
	USB	×4	USB2.0×3/USB3.0×1
结构(Structure)	裸机外形尺寸 (W x D x H) (Product Size (mm)(W x D x H))	2198.8mm×109.5mm×1253.8mm	
	包装尺寸(Package Size (mm)W x D x H)	2525mm×435mm×1750mm	
	外壳材料 (面框/后壳) (Housing Material)	钣金/钣金(Sheet-Metal/Sheet-Metal)	
	外壳颜色 (面框/后壳) (Housing Color)	黑色/黑色(Black/Black)	
	VESA 孔位 (VESA)	4-M8 螺丝孔 800mm×400mm (4-M8 Screw hole 800mm×400mm)	

语言(Language)	OSD	英语 / 简中等(English/Chinese)
附 件 (Packaging / Accessories)	遥控器(Remote Control)	×1
	电源线(Power Cord)	×1
	合格证(Qualified Certificate Lable)	×1
	保修卡(Warranty Card)	×1
	挂架(Wall Mount)	×1
	底座(The Base)	选配(Optional)

1.2 产品视图(Product View)

详见六视图

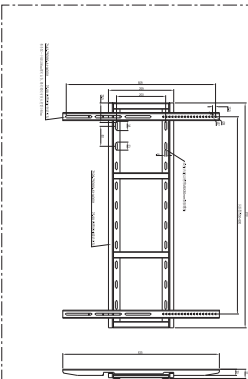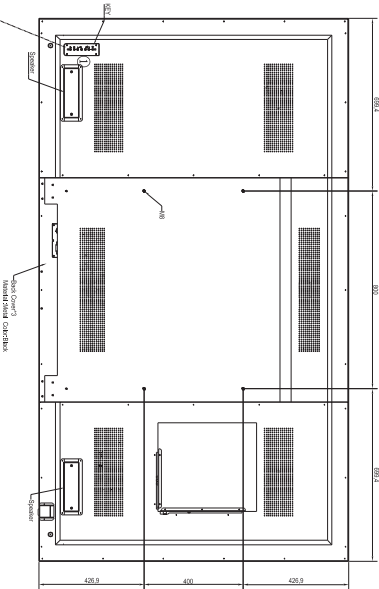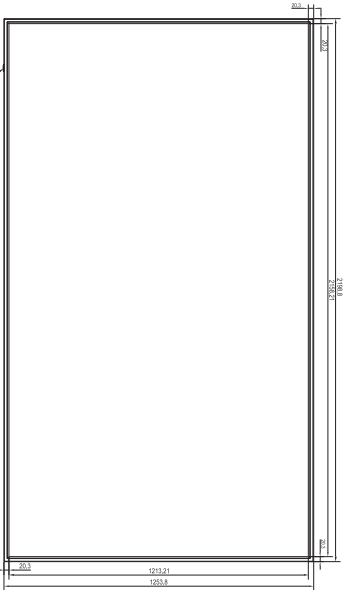

- ②
- TV
- USB4 USB3 USB3.0 USB2
- USB1 COMBOUT

- ③
- LAN
- VIDEO AUDIO4 AUDIO4
- HDMI1 HDMI2 (ARC)
- HDMI1
- AUDIO-OUT

XXX ± .56	X. ° ± 0.050	98P3		皓丽 Horion			
XXX ± .28	.X° ± 0.010						
XX ± .2	.XX° ± 0.005						
X ± .14	.XXX° ± 0.002						
THESE DIMENSIONS AND SPECIFICATIONS ARE THE PROPERTY OF KANGYE COMPUTER CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF KANGYE COMPUTER CO., LTD.		料号	批准	日期	材质	皓丽 Horion	
		审核	批图	日期	UNIT		
		1	MM	1:1	1/1		
		1	MM	1:1	1/1		